CRYSOUND | **Quick Start Guide**
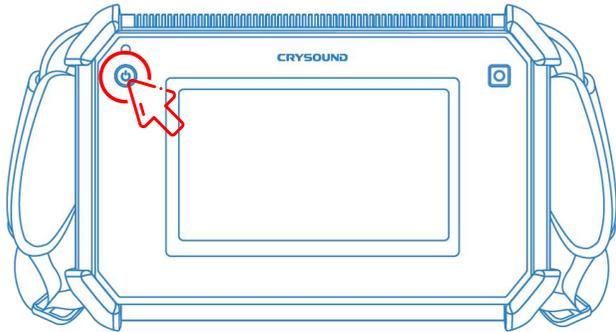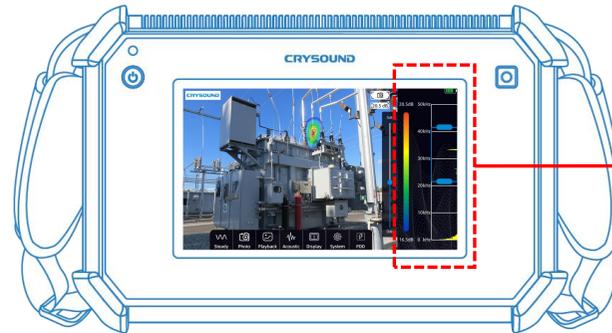CRY2620 Industrial Acoustic Imager

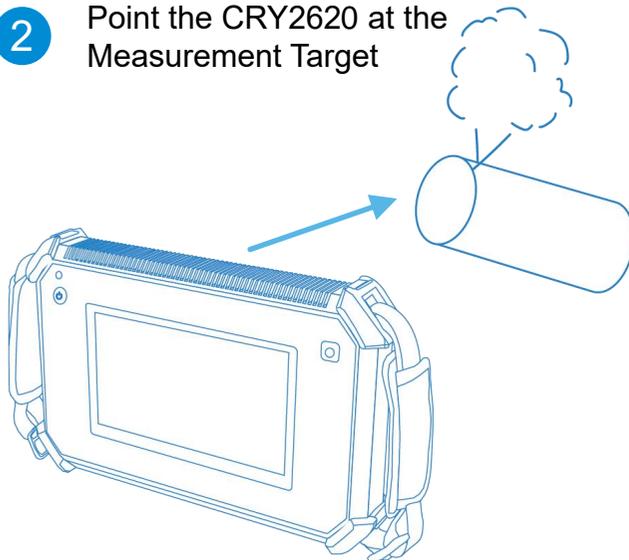**1** Power on the CRY2620

Press and hold the power button for 2 seconds

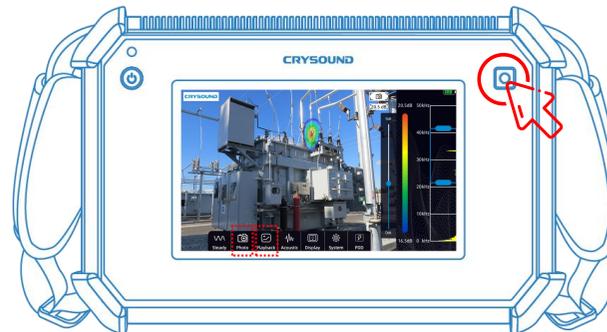**3** Adjust the Frequency Range

Select a suitable frequency range

Effective test bandwidth:
2kHz-48kHz

2 Point the CRY2620 at the Measurement Target

4 Photo/Video，record a measurement

-Press the button in the toolbar to switch modes, the available modes are "Photo" and "Video".

-Press the right button to start taking photos or videos.

-Press "Playback" to view saved photos and videos.

Download User Manual

Scan the QR code above
to download the user manual

Web: www.crysound.com

CRYSOUND
Measure Better Sound

CRY2620 Base Kit

1	CRY2620 Industrial Acoustic Imager
2	Hand straps
3	TF card
4	Shoulder strap

1	User Manual
2	Certificates
3	Earphones
4	Power adapter
5	Plug adapters
6	Charging cable
7	Card Reader