CRYSOUND

Quick Start Guide

CRY2623 Industrial Acoustic Imager

1 Power on the CRY2623

Press and hold the power button for 2 seconds

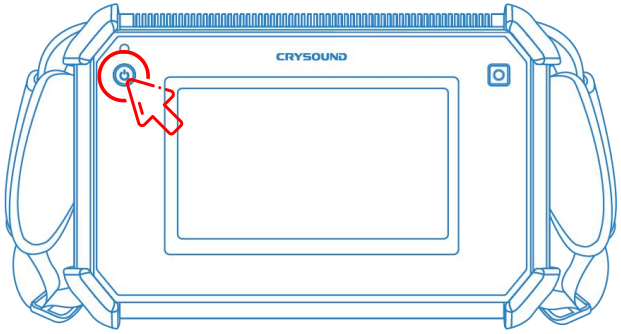

2 Point the CRY2623 at the Measurement Target

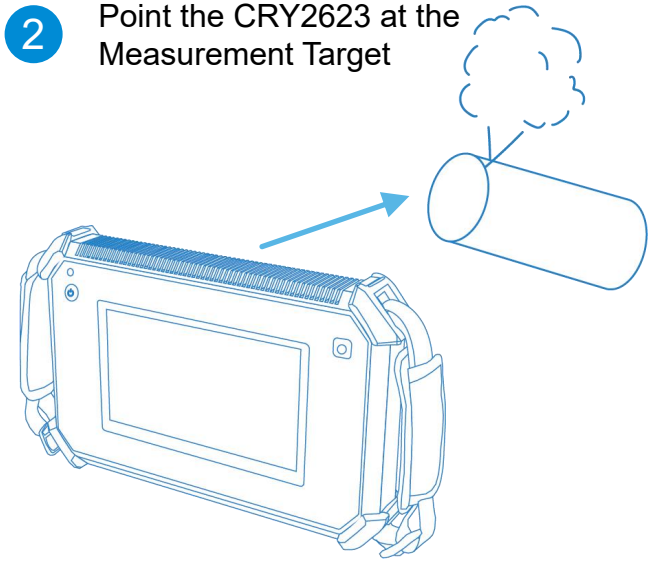

3 Adjust the Frequency Range

Select a suitable frequency range

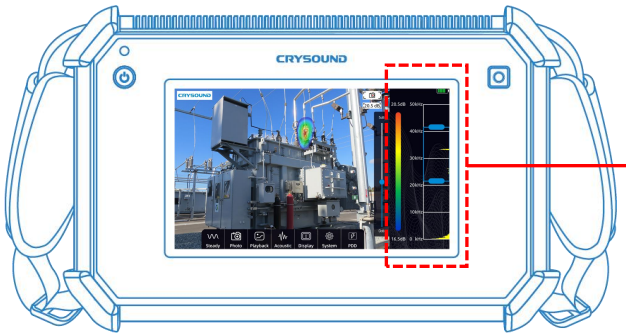

Effective test bandwidth:
2kHz-48kHz

4 Photo/Video，record a measurement

-Press the button in the toolbar to switch modes, the available modes are “Photo” and “Video”.

-Press the right button to start taking photos or videos.

-Press “Playback” to view saved photos and videos.

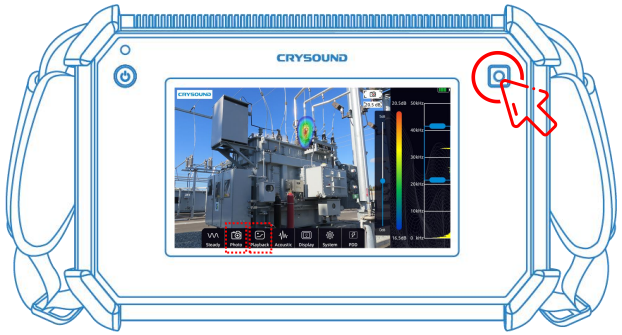

Download User Manual

Scan the QR code above
to download the user manual

Web: www.crysound.com

CRYSOUND
Measure Better Sound

CRY2623 Base Kit

1. CRY2623 Industrial Acoustic Imager
2. Hand straps
3. TF card
4. Shoulder strap

1. User Manual
2. Certificates
3. Earphones
4. Power adapter
5. Plug adapters
6. Charging cable
7. Card Reader